


DVR 5104C-V2 4CH

DVR

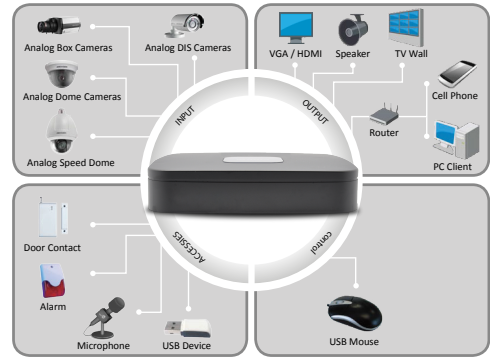

Key features

- รองรับกล้องได้สูงสุด 4 กล้อง
- บันทึกความละเอียดสูงสุด 960H ได้ทุกช่องไม่กระตุก
- แสดงผล 1080p Preview Realtime
- รองรับระบบ Cloud ไม่ต้อง Forward Port
- รองรับ DDns People Fu ดูออนไลน์ได้ทุกที่ทั่วโลก
- สนับสนุนการแสดงผลแบบ BNC,VGA และ HDMI
- Two-Way Talk Audio 1 Channel
- Manual/Schedule รองรับฮาร์ดดิส ได้สูงสุด 4 เทลไบท์ (1 SATA)

Rear Panel DVR 5104C-V2 4CH



Model	DVR 5104C-V2 4CH	DVR 5108C 8CH	DVR 5116C 16CH
Model	DVR 5104C-V2 4CH	DVR 5108C 8CH	DVR 5116C 16CH
System	Embedded processor		
Main Processor	Embedded processor		
Operating System	Embedded LINUX		
Video			
Input	4 channel, BNC	8 channel, BNC	16 channel, BNC
Standard	NTSC(525Line, 60f/s), PAL(625Line, 50f/s)		
Audio			
Input	1 channel, RCA	N/A	N/A
Output	1 channel, RCA	N/A	N/A
Two-way Talk	Reuse audio input/output channel 1	N/A	N/A
Display			
Interface	1HDMI, 1 VGA, 1 TV		
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768		
Display Split	1/4	1/4/8/9	1/4/8/9/16
Privacy Masking	4 rectangular zones (each camera)		
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording		
Recording			
Video Compression	H.264		
Resolution	960H/D1/4CIF(704×576/704×480)/2CIF(704×288/704×240)/CIF(352×288/352×240) / QCIF(176×144/176×120)		
Record Rate	Main Stream: 960H/D1/HD1/2CFI/CIF(1~25/30fps) Extra Stream: QCIF(1~25/30fps)/CIF(1~6/7fps)		
Bit Rate	48~3072Kb/s		
Record Mode	Manual, Schedule(Regular(Continuous), MD), Stop		
Record Interval	1~60 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec		
Video Detection			
Trigger Events	Recording, Tour, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips		
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank		
Playback & Backup			
Sync Playback	1/4	1/4/9	1/4/9/16
Search Mode	Time/Date, MD & Exact search (accurate to second)		
Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom		
Backup Mode	USB Device/Network/Internal SATA burner		
Network			
Ethernet	RJ-45 port (10/100M)		
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, SNMP, P2P		
Max. User Access	128 users		
Smart Phone	iPhone, iPad, Android, Windows Phone		
Storage			
Internal HDD	1 SATA port, up to 4TB		
Auxiliary Interface			
USB Interface	2 ports (1 Rear), USB2.0		
General			
Power Supply	DC12V/2A		
Power Consumption	10W(without HDD)		
Working Environment	-10°C ~+55°C / 10%~90%RH / 86~106kpa		
Dimension(W×D×H)	205mm×205mm		270mm×205mm×40mm
Weight	0.5KG		0.75KG