Fu HDTVI 928 Lens 6 mm. HDTVI Camera

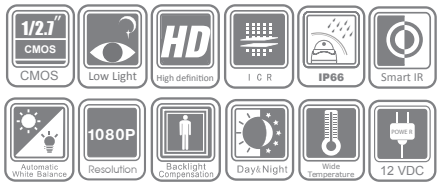

Key features

- 2 ล้านพิกเซล (1930 x 1088)
- 1/2.7" Progressive Scan CMOS
- การแสดงผลของสี ได้สีที่มีคุณภาพสูงสีสันสมจริง
- ให้ความละเอียดของภาพคมชัดในระดับ HD (Hight Definition)
- Patent EXIR Technology ให้แสงอินฟราเรดสว่างได้ไกลเป็นพิเศษ
- แสงอินฟราเรดสว่างไกลถึง 40 เมตร
- สนับสนุน OSD Menu Control
- สามารถจับภาพได้ในสภาพแวดล้อมที่แสงน้อย
- สามารถติดตั้งได้ทั้งภายนอก-ภายในอาคาร
- 86.22x82.05x220.13mm (3.39"x3.23"x8.67")

Dimensions

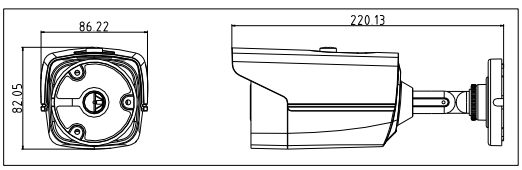

	Fu HDTVI 928 Lens 6 mm.
Camera	
Parameter	Turbo 1080p EXIR Bullet Camera
Image Sensor	1/2.7" Progressive Scan CMOS
Signal System	PAL/NTSC
Electronic pixels	1930 (H) x 1088 (V)
Min Illumination	0.01 Lux@F1.2.AGC ON).0 Lux with IR
Shutter Time	1/25(1/30) s to 1 / 50,000 s
Lens	3.6mm (2.8mm, 6mm, 8mm, 12mm, 16mm optional) Angle of View: 90°(3.6mm), 55.4°(6mm), 41.6°(8mm), 26.6°(12mm), 20.6°(16mm)
Lens mount	M12
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame rate	1080p@25fps/1080p@30fps
HD Video outout	1 Turbo HD outputs
S / N ratio	More than 52 dB
Menu	
Camera ID	On/off (0-255)
AGC	Support
D/N Mode	Color/BW/Auto/EXT
White Balance	Auto/User/Push/8000K/6000K/4200K/3000K
Privacy Mask	On/Off,maximum 2 zones
Motion Detection	On/Off,maximum 4 zones
BLC	Support
Anti-flicker	On/Off
Language	English/Chinese
Functions	Digital noise reduction,Mirror
General	
Working	-40°C - 60°C (-40°F - 140°F)
Temperature/Humidity	Humidity 90% or less (non-condensing)
Power supply	12 V DC
Power Consumption	Max.3W
Ingress protection Level	IP66
IR range	Up to 40m
Communication	Up the coax Protocal : HIKVISION-C(Coaxitron)
Dimensions	86.22x82.05x220.13mm(3.39"x3.23"x8.67")
Weight	430g (0.95 lbs)