


# NVR5232-4K-S2

# NVR

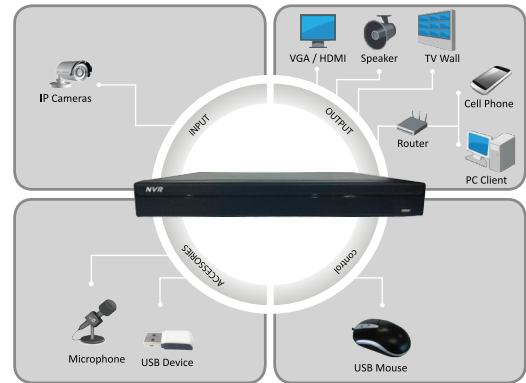

## Feature

- เครื่องบันทึก NVR ต่อกล้อง IP Camera ได้สูงสุดจำนวน 32 กล้อง
- ใช้สาย LAN ในการรับ-ส่งสัญญาณภาพ , เสียง , Control
- ระบบการบีบอัดข้อมูลแบบ H.264,H.265 เมฆภาษาอังกฤษ
- รองรับกล้อง IP Camera ที่ความละเอียดสูงสุด 12 ล้าน พิกเซล
- Resolution Output 4K/3840 x 2160 ผ่าน HDMI
- ฟังก์ชัน ค้นหาของหายอัจฉริยะ (Smart Search)
- ฟังก์ชัน Motion Detection / E-mail / FTP
- ฟังก์ชัน Privacy Mask การปกปิดพื้นที่ส่วนบุคคล
- ฟังก์ชัน Video Masking สัญญาณแจ้งเตือนเมื่อมีคนมาปิดหน้ากล้อง
- ฟังก์ชัน การแจ้งเตือนสัญญาณภาพของกล้องสูญหาย
- รองรับ Push Video
- รองรับ Two Way Talk Audio
- รองรับการดูผ่านระบบ P2P Cloud บนเว็บเบราว์เซอร์ที่ <https://www.easy4ip.com>
- โหมดการบันทึก Manual / Schedule / Motion Detection
- Audio Format G711a
- รองรับ Harddisk 2 SATA Interface ( Max HDD 12 TB )
- App Mobile สำหรับดูผ่านมือถือ People Fu Intelligent V.2 (Andriod) , iDMSS Lite (Andriod) , iDMSS Lite (iOS)



Model	NVR5232-4K-S2
System	
Main Processor	Quad-core embedded processor
Operating System	Embedded LINUX
Display	
Interface	1 HDMI (1 HDMI up to 3840x2160), 1 VGA
Resolution	3840x2160, 1920x1080, 1280x1024, 1280x720, 1024x768
Multi screen Display	32CH: 1/4/8/9/16/25/36
Video Detection and Alarm	
Trigger Events	Recording, PTZ, Tour, Alarm Out, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips
Video Detection	Motion Detection, MD Zones: 396 (22 x 18), Video Loss and Tampering
Alarm input	4 Channel, Low Level Effective, Green Terminal Interface
Storage	
Internal HDD	2 SATA III Ports, up to 6TB capacity for each HDD
Auxiliary Interface	
USB	2 ports (1 Rear USB3.0,1 Front USB2.0)
RS232	1 Port, for PC Communication and Keyboard
RS485	1 Port, for PTZ Control
Audio and Video	
IP Camera Input	8/16/32 Channel
Two-way Talk	1 Channel Input, 1 Channel Output, RCA
Recording	
Compression	H.265/H.264/MJPEG/MPEG4
Resolution	12Mp/8Mp/6Mp/5Mp/4Mp/3Mp/1080P/ 720P/ D1&etc.
Record Rate	320Mbps
Bit Rate	16kbps~20Mbps for per channel
Network	
Interface	1 RJ-45 port (10/100/1000Mbps)
Ethernet Port	1 Independent 1000Mbps Ethernet Port
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, IP Search(Support Dahua IP camera, DVR, NVS and etc.), P2P
Max. User Access	128 users
Interoperability	ONVIF 2.4, CGI Conformant