Fu HAC-HFW2100BP

HDCVI Camera

	Fu HAC-HFW2100BP
Camera	
Image Sensor	1/3" 1.3Megapixel CMOS
Effective Pixels	1280(H) x 960(V)
Electronic Shutter	PAL: 4/25s~1/45,000s;NTSC:4/30~1/54,000s
Video Frame Rate	1280x720@25 fps ; 1280x720@30fps; 1280x720@50 fps ; 1280x720@60fps
Synchronization	Internal
Min Illumination	0.01 Lux@F1.2(0Lux IR LED on)
Video Output	1-channel BNC HDCVI high definition video output/CVBS standard defi nition video output (Can switch)
Camera Features	
Max.IR LEDs Length	30m,Smart IR
Day & Night	Auto(ICR)/B&W/Color
Noise Reduction	3D/2D
OSD Menu	-
Lens	
Focal length	2.8mm.3.6mm.6mm.8mm
Mount type	M12
General	
Power Consumption	DC12V±10%
Working Environment	-30°C -+60°C Humidty is less than 95 % (no condensation)
Transmission Distance	Over 500m via 75-3 coaxial cable
Ingress Protection	IP66
Dimensioms (WxDxH)	200.2mm x89.1mmx80.4mm
Weight	450g
Others	N/A

Key features

- 1/3" 1.3 Megapixel CMOS
- ระบบกล้อง HDCVI ความละเอียดสูง
- Real Time up to 60 fps@720p
- High Speed ส่งภาพ Real Time
- HD และ Standard definition switch
- Day/Night(ICR),AGC,BLC,3D-DNR
- ระบบ Array Infrared ระยะสูง 30 เมตร
- มีระบบ Smart IR
- เหมาะสำหรับติดตั้งภายนอก-ภายในอาคาร (IP66)

* ควรใช้กับเครื่องบันทึก : HCVR5104H,HCVR5108H

Dimensions
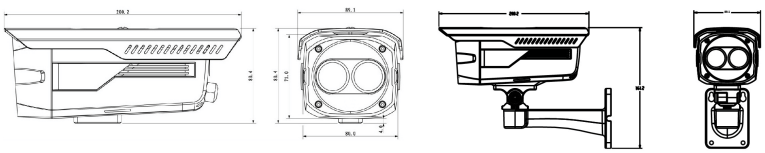
Dimensions (mm)